

Keysight Technologies

E4980A Precision LCR Meter 20 Hz to 2 MHz

E4980AL Precision LCR Meter
20 Hz to 300 kHz/500 kHz/1 MHz

Data Sheet



powertronics



LXI

Fully compliant to
LXI Class C specification

Table of Contents

Definitions	03
How to Use Tables	03
E4980A/E4980AL	03
Basic Specifications	04
Measurement functions	04
Test signal.....	05
Measurement display ranges	07
Absolute measurement accuracy	08
Relative accuracy	10
Basic accuracy	12
Short offset Zs	14
Open offset Yo.....	14
Calibration accuracy Acal	16
Measurement accuracy.....	17
Compensation function.....	18
DC bias signal.....	19
Measurement assistance functions	19
Options	20
Frequency options.....	20
Interface options	20
Other options.....	20
Power and DC bias enhancement specification	21
Test signal.....	21
DCR measurement specification	25
General Specifications	27
Supplemental Information	31
Settling time	31
Measurement circuit protection	31
Measurement time	32
Display time	35
Measurement data transfer time	35
Maximum DC bias current	36
Relative measurement accuracy with bias current isolation	37
DC bias settling time.....	37
Web Resources	38



Definitions

All specifications apply to the conditions of a 0 to 55°C temperature range, unless otherwise stated, and 30 minutes after the instrument has been turned on.

Specifications (spec.): Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

Supplemental information is provided as information that is useful in operating the instrument, but is not covered by the product warranty. This information is classified as either typical or nominal.

Typical (typ.): Expected performance of an average unit without taking guardbands into account.

Nominal (nom.): A general descriptive term that does not imply a level of performance.

How to Use Tables

When measurement conditions fall under multiple categories in a table, apply the best value.

For example, basic accuracy Ab is 0.10% under the following conditions:

Measurement time mode	SHORT
Test frequency	125 Hz
Test signal voltage	0.3 Vrms



Powertronics

The E4980A is the model number of the 20 Hz to 2 MHz frequency range LCR meter. The E4980AL is the model number of the 20 Hz to 300 kHz, 500 kHz or 1 MHz frequency range LCR meter. See the E4980A/E4980AL Configuration Guide (5989-8321EN) for more details.

Frequency range	Model number and option
20 Hz to 2 MHz	E4980A
20 Hz to 1 MHz	E4980AL-102
20 Hz to 500 kHz	E4980AL-052
20 Hz to 300 kHz	E4980AL-032



Basic Specifications

Measurement functions

Measurement parameters

- Cp-D, Cp-Q, Cp-G, Cp-Rp
- Cs-D, Cs-Q, Cs-Rs
- Lp-D, Lp-Q, Lp-G, Lp-Rp, Lp-Rdc
- Ls-D, Ls-Q, Ls-Rs, Ls-Rdc
- R-X
- Z- θ d, Z- θ r
- G-B
- Y- θ d, Y- θ r
- Vdc-Idc¹

Definitions

C _p	Capacitance value measured with parallel-equivalent circuit model
C _s	Capacitance value measured with series-equivalent circuit model
L _p	Inductance value measured with parallel-equivalent circuit model
L _s	Inductance value measured with series-equivalent circuit model
D	Dissipation factor
Q	Quality factor (inverse of D)
G	Equivalent parallel conductance measured with parallel-equivalent circuit model
R _p	Equivalent parallel resistance measured with parallel-equivalent circuit model
R _s	Equivalent series resistance measured with series-equivalent circuit model
R _{dc}	Direct-current resistance
R	Resistance
X	Reactance
Z	Impedance
Y	Admittance
θ d	Phase angle of impedance/admittance (degree)
θ r	Phase angle of impedance/admittance (radian)
B	Susceptance
V _{dc}	Direct-current voltage
I _{dc}	Direct-current electricity

Deviation measurement function: Deviation from reference value and percentage of deviation from reference value can be output as the result.

Equivalent circuits for measurement: Parallel, Series

Impedance range selection: Auto (auto range mode), manual (hold range mode)

Trigger mode: Internal trigger (INT), manual trigger (MAN), external trigger (EXT), GPIB trigger (BUS)

1. E4980A-001 is required.



Table 1. Trigger delay time

Range	0 s - 999 s
Resolution	100 µs (0 s ≤ - ≤ 100 s) 1 ms (100 s < - ≤ 999 s)

Table 2. Step delay time

Range	0 s - 999 s
Resolution	100 µs (0 s ≤ - ≤ 100 s) 1 ms (100 s < - ≤ 999 s)

Measurement terminal: Four-terminal pair**Test cable length:** 0 m, 1 m, 2 m, 4 m

Measurement time modes: Short mode, medium mode, long mode.

Table 3. Averaging

Range	1 - 256 measurements
Resolution	1

Test signal

Table 4. Test frequencies

Test frequencies	20 Hz - 2 MHz (E4980A) 20 Hz - 1 MHz (E4980AL-102) 20 Hz - 500 kHz (E4980AL-052) 20 Hz - 300 kHz (E4980AL-032)
Resolution	0.01 Hz (20 Hz - 99.99 Hz) 0.1 Hz (100 Hz - 999.9 Hz) 1 Hz (1 kHz - 9.999 kHz) 10 Hz (10 kHz - 99.99 kHz) 100 Hz (100 kHz - 999.9 kHz) 1 kHz (1 MHz - 2 MHz)
Measurement accuracy	±0.01%

Table 5. Test signal modes

Normal	Program selected voltage or current at the measurement terminals when they are opened or short-circuited, respectively.
Constant	Maintains selected voltage or current at the device under test (DUT) independently of changes in impedance of DUT.



Power Electronics



Signal level

Table 6. Test signal voltage

Range	0 Vrms - 2.0 Vrms			
Resolution	100 μ Vrms (0 Vrms \leq - \leq 0.2 Vrms) 200 μ Vrms (0.2 Vrms < - \leq 0.5 Vrms) 500 μ Vrms (0.5 Vrms < - \leq 1 Vrms) 1 mVrms (1 Vrms < - \leq 2 Vrms)			
Accuracy	Normal	$\pm(10\% + 1 \text{ mVrms})$	Test frequency \leq 1 MHz: spec. Test frequency > 1 MHz: typ.	
	Constant ¹	$\pm(6\% + 1 \text{ mVrms})$		
		Test frequency \leq 1 MHz: spec. Test frequency > 1 MHz: typ.		

Table 7. Test signal current

Range	0 Arms - 20 mAmps			
Resolution	1 μ Amps (0 Arms \leq - \leq 2 mAmps) 2 μ Amps (2 mAmps < - \leq 5 mAmps) 5 μ Amps (5 mAmps < - \leq 10 mAmps) 10 μ Amps (10 mAmps < - \leq 20 mAmps)			
Accuracy	Normal	$\pm(10\% + 10 \text{ } \mu\text{Amps})$	Test frequency \leq 1 MHz: spec. Test frequency > 1 MHz: typ.	
	Constant ¹	$\pm(6\% + 10 \text{ } \mu\text{Amps})$		
		Test frequency \leq 1 MHz: spec. Test frequency > 1 MHz: typ.		

Output impedance: 100 Ω (nominal)

Test signal level monitor function

- Test signal voltage and test signal current can be monitored.
- Level monitor accuracy:



Powertronics

Table 8. Test signal voltage monitor accuracy (Vac)

Test signal voltage ²	Test frequency	Specification
5 mVrms - 2 Vrms	\leq 1 MHz $>$ 1 MHz	$\pm(3\% \text{ of reading value} + 0.5 \text{ mVrms})$ $\pm(6\% \text{ of reading value} + 1 \text{ mVrms})$

Table 9. Test signal current monitor accuracy (Iac)

Test signal current ²	Test frequency	Specification
50 μ Amps - 20 mAmps	\leq 1 MHz $>$ 1 MHz	$\pm(3\% \text{ of reading value} + 5 \text{ } \mu\text{Amps})$ $\pm(6\% \text{ of reading value} + 10 \text{ } \mu\text{Amps})$

1. When auto level control function is on.
2. This is not an output value but rather a displayed test signal level.



Measurement display ranges

Table 10 shows the range of measured value that can be displayed on the screen. For the effective measurement ranges, refer to Figure 1 impedance measurement accuracy example.

Table 10. Allowable display ranges for measured values

Parameter	Measurement display range
C _s , C _p	± 1.000000 aF to 999.9999 EF
L _s , L _p	± 1.000000 aH to 999.9999 EH
D	± 0.000001 to 9.999999
Q	± 0.01 to 9999.99
R, R _s , R _p , X, Z, R _{dc}	± 1.000000 aΩ to 999.9999 EΩ
G, B, Y	± 1.000000 aS to 999.9999 ES
V _{dc}	± 1.000000 aV to 999.9999 EV
I _{dc}	± 1.000000 aA to 999.9999 EA
θ _r	± 1.000000 arad to 3.141593 rad
θ _d	± 0.0001 deg to 180.0000 deg
Δ%	± 0.0001% to 999.9999%

a: 1 × 10⁻¹⁸, E: 1 × 10¹⁸



Powertronics



Absolute measurement accuracy

The following equations are used to calculate absolute accuracy.

Absolute accuracy Aa of $|Z|$, $|Y|$, L, C, R, X, G, B (L, C, X, and B accuracies apply when $D_x \leq 0.1$, R and G accuracies apply when $Q_x \leq 0.1$)

When $D_x \geq 0.1$, multiply Acal by $\sqrt{1+D_x^2}$ for L, C, X, and B accuracies

When $Q_x \geq 0.1$, multiply Acal by $\sqrt{1+Q_x^2}$ for R and G accuracies

Under an AC magnetic field, the following equation is applied to the measurement accuracy.

$$A_x (1 + B_x (2 + 0.5 / V_s))$$

where A Absolute accuracy

B Magnetic flux density [Gauss]

Vs Test signal voltage level [Volts]

Equation 1. Aa = Ae + Acal

Aa Absolute accuracy (% of reading value)

Ae Relative accuracy (% of reading value)

Acal Calibration accuracy (%)

where G accuracy is applied only to G-B measurements.

D accuracy (when $D_x \leq 0.1$)

Equation 2. De + θcal

Dx Measured D value

De Relative accuracy of D

θcal Calibration accuracy of θ (radian)

when $0.1 < D_x \leq 1$, multiply θcal by $(1 + D_x)$

Q accuracy (When $Q_x \times Da < 1$)

$$\text{Equation 3. } \pm \frac{(Q_x^2 \times Da)}{(1 \pm Q_x \times Da)}$$

Qx Measured Q value

Da Absolute accuracy of D

θ accuracy

Equation 4. θe + θcal

θe Relative accuracy of θ (degree)

θcal Calibration accuracy of θ (degree)



Powertronics



G accuracy (when $Dx \leq 0.1$)

$$\text{Equation 5.} \quad Bx + Da \quad (S) \\ Bx = 2\pi f Cx = \frac{1}{2\pi f Lx}$$

- Dx Measured D value
- Bx Measured B value (S)
- Da Absolute accuracy of D
- f Test frequency (Hz)
- Cx Measured C value (F)
- Lx Measured L value (H)

where the accuracy of G is applied to Cp-G measurements.

Absolute accuracy of Rp (when $Dx \leq 0.1$)

$$\text{Equation 6.} \quad \pm \frac{Rpx \times Da}{Dx \mp Da} \quad (\Omega)$$

- Rpx Measured Rp value (Ω)
- Dx Measured D value
- Da Absolute accuracy of D

Absolute accuracy of Rs (when $Dx \leq 0.1$)

$$\text{Equation 7.} \quad Xx \times Da \quad (\Omega) \\ Xx = \frac{1}{2\pi f Cx} = 2\pi f Lx$$

- Dx Measured D value
- Xx Measured X value (Ω)
- Da Absolute accuracy of D
- f Test frequency (Hz)
- Cx Measured C value (F)
- Lx Measured L value (H)



Powertronics



Relative accuracy

Relative accuracy includes stability, temperature coefficient, linearity, repeatability, and calibration interpolation error. Relative accuracy is specified when all of the following conditions are satisfied:

- Warm-up time: 30 minutes
 - Test cable length: 0 m, 1 m, 2 m, or 4 m (Keysight Technologies, Inc. 16048A/D/E)
 - A “Signal Source Overload” warning does not appear.
- When the test signal current exceeds a value in table 11 below, a “Signal Source Overload” warning appears.

Table 11.

Test signal voltage	Test frequency	Condition ¹
≤ 2 Vrms	–	–
> 2 Vrms	≤ 1 MHz	The smaller value of either 110 mA or 130 mA - 0.0015 × Vac × (Fm / 1 MHz) × (L_cable + 0.5)
	> 1 MHz	70 mA - 0.0015 × Vac × (Fm / 1 MHz) × (L_cable + 0.5)

Vac [V] Test signal voltage

Fm [Hz] Test frequency

L_cable [m] Cable length

- OPEN and SHORT corrections have been performed.
- Bias current isolation: Off
- The DC bias current does not exceed a set value within each range of the DC bias current
- The optimum impedance range is selected by matching the impedance of DUT to the effective measuring range.

|Z|, |Y|, L, C, R, X, G, and B accuracy (L, C, X, and B accuracies apply when Dx ≤ 0.1, R and G accuracies apply Qx ≤ 0.1)

When Dx > 0.1, multiply Ae by $\sqrt{1+D_x^2}$ for L, C, X, and B accuracies

When Qx > 0.1, multiply Ae by $\sqrt{1+Q_x^2}$ for R and G accuracies

Relative accuracy Ae is given as:

$$\text{Equation 8.} \quad Ae = [Ab + Zs / |Zm| \times 100 + Yo \times |Zm| \times 100] \times Kt$$

Zm Impedance of DUT

Ab Basic accuracy

Zs Short offset

Yo Open offset

Kt Temperature coefficient

D accuracy

D accuracy De is given as – when Dx ≤ 0.1

$$\text{Equation 9.} \quad De = \pm Ae / 100$$

Dx Measured D value

Ae Relative accuracies of |Z|, |Y|, L, C, R, X, G, and B

When 0.1 < Dx ≤ 1, multiply De by (1 + Dx)

1. When the calculation result is a negative value, 0 A is applied.



Q accuracy (when $Q \times De < 1$)

Q accuracy Qe is given as:

$$\text{Equation 10.} \quad Qe = \pm \frac{(Qx^2 \times De)}{(1 \mp Qx \times De)}$$

Qx Measured Q value

De Relative D accuracy

θ accuracy

θ accuracy θe is given as:

$$\text{Equation 11.} \quad \theta e = \frac{180 \times Ae}{\pi \times 100} \text{ (deg)}$$

Ae Relative accuracies of $|Z|$, $|Y|$, L, C, R, X, G, and B

G accuracy (when $Dx \leq 0.1$)

G accuracy Ge is given as:

$$\text{Equation 12.} \quad Ge = Bx \times De \quad (\text{S})$$

$$Bx = 2\pi f Cx = \frac{1}{2\pi f Lx}$$

Ge Relative G accuracy

Dx Measured D value

Bx Measured B value

De Relative D accuracy

f Test frequency (Hz)

Cx Measured C value (F)

Lx Measured L value (H)



Powertronics

Rp accuracy (when $Dx \leq 0.1$)

Rp accuracy Rpe is given as:

$$\text{Equation 13.} \quad Rpe = \pm \frac{Rpx \times De}{Dx \pm De} \quad (\Omega)$$

Rpe Relative Rp accuracy

Rpx Measured Rp value (Ω)

Dx Measured D value

De Relative D accuracy

Rs accuracy (when $Dx \leq 0.1$)

Rs accuracy Rse is given as:

$$\text{Equation 14.} \quad Rse = Xx \times De \quad (\Omega)$$

$$Xx = \frac{1}{2\pi f Cx} = 2\pi f Lx$$

Rse Relative Rs accuracy

Dx Measured D value

Xx Measured X value (Ω)

De Relative D accuracy

f Test frequency (Hz)

Cx Measured C value (F)

Lx Measured L value (H)



Example of C-D accuracy calculation

Measurement conditions

Test frequency: 1 kHz
Measured C value: 100 nF
Test signal voltage: 1 Vrms
Measurement time mode: Medium
Measurement temperature: 23°C

$$Ab = 0.05\%$$

$$|Z_m| = 1 / (2\pi \times 1 \times 103 \times 100 \times 10^{-9}) = 1590 \Omega$$

$$Z_s = 0.6 \text{ m}\Omega \times (1 + 0.400/1) \times (1 + \sqrt{1000/1000}) = 1.68 \text{ m}\Omega$$

$$Y_0 = 0.5 \text{ nS} \times (1 + 0.100/1) \times (1 + \sqrt{100/1000}) = 0.72 \text{ nS}$$

$$\text{C accuracy: } Ae = [0.05 + 1.68 \text{ m} / 1590 \times 100 + 0.72 \text{ n} \times 1590 \times 100] \times 1 = 0.05\%$$

$$\text{D accuracy: } De = 0.05 / 100 = 0.0005$$

Basic accuracy

Basic accuracy Ab is given from Table 12, 13, 14 and 15.

Table 12. Measurement time mode = SHORT

Test frequency [Hz]	Test signal voltage				
	5 mVrms ≤ - < 50 mVrms	50 mVrms ≤ - < 0.3 Vrms	0.3 Vrms ≤ - ≤ 1 Vrms	1 Vrms < - ≤ 10 Vrms	10 Vrms < - ≤ 20 Vrms
20 ≤ - < 125	(0.6%) × (50 mVrms/Vs)	0.60%	0.30%	0.30%	0.30%
125 ≤ - < 1 M	(0.2%) × (50 mVrms/Vs)	0.20%	0.10%	0.15%	0.15%
1 M < - ≤ 2 M	(0.4%) × (50 mVrms/Vs)	0.40%	0.20%	0.30%	0.30%

Table 13. Measurement time mode = MED, LONG

Test frequency [Hz]	Test signal voltage				
	5 mVrms ≤ - < 30 mVrms	30 mVrms ≤ - < 0.3 Vrms	0.3 Vrms ≤ - ≤ 1 Vrms	1 Vrms < - ≤ 10 Vrms	10 Vrms < - ≤ 20 Vrms
20 ≤ - < 100	(0.25%) × (30 mVrms/Vs)	0.25%	0.10%	0.15%	0.15%
100 ≤ - < 1 M	(0.1%) × (30 mVrms/Vs)	0.10%	0.05%	0.10%	0.15%
1 M < - ≤ 2 M	(0.2%) × (30 mVrms/Vs)	0.20%	0.10%	0.20%	0.30%

Vs [Vrms]

Test signal voltage



Effect by impedance of DUT

Table 14. For impedance of DUT below 30Ω , the following value is added.

Test frequency [Hz]	Impedance of DUT	
	$1.08 \Omega \leq Z_x < 30 \Omega$	$ Z_x < 1.08 \Omega$
$20 \leq - \leq 1 \text{ M}$	0.05%	0.10%
$1 \text{ M} < - \leq 2 \text{ M}$	0.10%	0.20%

Table 15. For impedance of DUT over $9.2 \text{ k}\Omega$, the following value is added.

Test frequency [Hz]	Impedance of DUT	
	$9.2 \text{ k}\Omega < Z_x \leq 92 \text{ k}\Omega$	$92 \text{ k}\Omega < Z_x $
$10 \text{ k} \leq - \leq 100 \text{ k}$	0%	0.05%
$100 \text{ k} < - \leq 1 \text{ M}$	0.05%	0.05%
$1 \text{ M} < - \leq 2 \text{ M}$	0.10%	0.10%

Effect of cable extension

When the cable is extended, the following element is added per one meter.

$$0.015\% \times (F_m/1 \text{ MHz})^2 \times (L_{\text{cable}})^2$$

F_m [Hz] Test frequency
 L_{cable} [m] Cable length



Powertronics



Short offset Zs

Table 16. Impedance of DUT $> 1.08 \Omega$

Test frequency [Hz]	Measurement time mode	
	SHORT	MED, LONG
20 - 2 M	$2.5 \text{ m}\Omega \times (1 + 0.400/\text{Vs}) \times (1 + \sqrt{(1000/\text{Fm})})$	$0.6 \text{ m}\Omega \times (1 + 0.400/\text{Vs}) \times (1 + \sqrt{(1000/\text{Fm})})$

Table 17. Impedance of DUT $\leq 1.08 \Omega$

Test frequency [Hz]	Measurement time mode	
	SHORT	MED, LONG
20 - 2 M	$1 \text{ m}\Omega \times (1 + 1/\text{Vs}) \times (1 + \sqrt{(1000/\text{Fm})})$	$0.2 \text{ m}\Omega \times (1 + 1/\text{Vs}) \times (1 + \sqrt{(1000/\text{Fm})})$

Vs [Vrms] Test signal voltage
 Fm [Hz] Test frequency

Effect of cable extension (Short offset)

Table 18. When the cable is extended, the following value is added to Zs (independent of the measurement time mode).

Test frequency [Hz]	Cable length			
	0 m	1 m	2 m	4 m
20 \leq - \leq 1 M	0	0.25 mΩ	0.5 mΩ	1 mΩ
1 M < - \leq 2 M	0	1 mΩ	2 mΩ	4 mΩ

Open offset Yo

Table 19. Test signal voltage $\leq 2.0 \text{ Vrms}$

Test frequency [Hz]	Measurement time mode	
	SHORT	MED, LONG
20 \leq - \leq 100 k	$2 \text{ nS} \times (1 + 0.100/\text{Vs}) \times (1 + \sqrt{(100/\text{Fm})})$	$0.5 \text{ nS} \times (1 + 0.100/\text{Vs}) \times (1 + \sqrt{(100/\text{Fm})})$
100 k < - \leq 1 M	$20 \text{ nS} \times (1 + 0.100/\text{Vs})$	$5 \text{ nS} \times (1 + 0.100/\text{Vs})$
1 M < - \leq 2 M	$40 \text{ nS} \times (1 + 0.100/\text{Vs})$	$10 \text{ nS} \times (1 + 0.100/\text{Vs})$

Table 20. Test signal voltage $> 2.0 \text{ Vrms}$

Test frequency [Hz]	Measurement time mode	
	SHORT	MED, LONG
20 \leq - \leq 100 k	$2 \text{ nS} \times (1 + 2/\text{Vs}) \times (1 + \sqrt{(100/\text{Fm})})$	$0.5 \text{ nS} \times (1 + 2/\text{Vs}) \times (1 + \sqrt{(100/\text{Fm})})$
100 k < - \leq 1 M	$20 \text{ nS} \times (1 + 2/\text{Vs})$	$5 \text{ nS} \times (1 + 2/\text{Vs})$
1 M < - \leq 2 M	$40 \text{ nS} \times (1 + 2/\text{Vs})$	$10 \text{ nS} \times (1 + 2/\text{Vs})$

Vs [Vrms] Test signal voltage
 Fm [Hz] Test frequency

Note

The Open Offset may become three times greater in the ranges of 40 to 70 kHz and 80 to 100 kHz due to residual response.



Effect of cable length

Table 21. When the cable is extended, multiply Yo by the following factor.

Test frequency [Hz]	Cable length			
	0 m	1 m	2 m	4 m
100 ≤ - < 100 k	1	1 + 5 × Fm/1 MHz	1 + 10 × Fm/1 MHz	1 + 20 × Fm/1 MHz
100 k ≤ - ≤ 1 M	1	1 + 0.5 × Fm/1 MHz	1 + 1 × Fm/1 MHz	1 + 2 × Fm/1 MHz
1 M < - ≤ 2 M	1	1 + 1 × Fm/1 MHz	1 + 2 × Fm/1 MHz	1 + 4 × Fm/1 MHz

Fm [Hz] Test frequency

Temperature factor Kt

Table 22. The temperature factor Kt is given below.

Temperature [°C]	Kt
0 ≤ - < 18	4
18 ≤ - ≤ 28	1
28 < - ≤ 55	4



Powertronics



Calibration accuracy Acal

Calibration accuracy Acal is given below.

For impedance of DUT or test frequency on the boundary line, apply the smaller value.

Table 23. Impedance range = 0.1, 1, 10 Ω

Test frequency [Hz]						
	20 - 1 k	1 k - 10 k	10 k -100 k	100 k - 300 k	300 k - 1 M	1 M - 2 M
Z [%]	0.03	0.05	0.05	0.05 + 5×10^{-5} Fm	0.05 + 5×10^{-5} Fm	0.1 + 1×10^{-4} Fm
Θ [radian]	1×10^{-4}	2×10^{-4}	3×10^{-4}	3×10^{-4} + 2×10^{-7} Fm	3×10^{-4} + 2×10^{-7} Fm	6×10^{-4} + 4×10^{-7} Fm

Table 24. Impedance range = 100 Ω

Test frequency [Hz]						
	20 - 1 k	1 k - 10 k	10 k -100 k	100 k - 300 k	300 k - 1 M	1 M - 2 M
Z [%]	0.03	0.05	0.05	0.05 + 5×10^{-5} Fm	0.05 + 5×10^{-5} Fm	0.1 + 1×10^{-4} Fm
Θ [radian]	1×10^{-4}	2×10^{-4}	3×10^{-4}	3×10^{-4}	3×10^{-4}	6×10^{-4}

Table 25. Impedance range = 300, 1 kΩ

Test frequency [Hz]						
	20 - 1 k	1 k - 10 k	10 k -100 k	100 k - 300 k	300 k - 1 M	1 M - 2 M
Z [%]	0.03	0.03	0.05	0.05	0.05	0.1
Θ [radian]	1×10^{-4}	1×10^{-4}	3×10^{-4}	3×10^{-4}	3×10^{-4}	6×10^{-4}

Table 26. Impedance range = 3 k, 10 kΩ

Test frequency [Hz]						
	20 - 1 k	1 k - 10 k	10 k -100 k	100 k - 300 k	300 k - 1 M	1 M - 2 M
Z [%]	0.03 + 1×10^{-4} Fm	0.06 + 2×10^{-4} Fm				
Θ [radian]	(100 + 2.5 Fm) $\times 10^{-6}$	(200 + 5 Fm) $\times 10^{-6}$				

Table 27. Impedance range = 30 k, 100 kΩ

Test frequency [Hz]						
	20 - 1 k	1 k - 10 k	10 k -100 k	100 k - 300 k	300 k - 1 M	1 M - 2 M
Z [%]	0.03 + 1×10^{-3} Fm	0.03 + 1×10^{-4} Fm	0.06 + 2×10^{-4} Fm			
Θ [radian]	(100 + 20 Fm) $\times 10^{-6}$	(100 + 2.5 Fm) $\times 10^{-6}$	(200 + 5 Fm) $\times 10^{-6}$			

Fm[kHz] Test frequency



Measurement accuracy

The impedance measurement calculation example below is the result of absolute measurement accuracy.

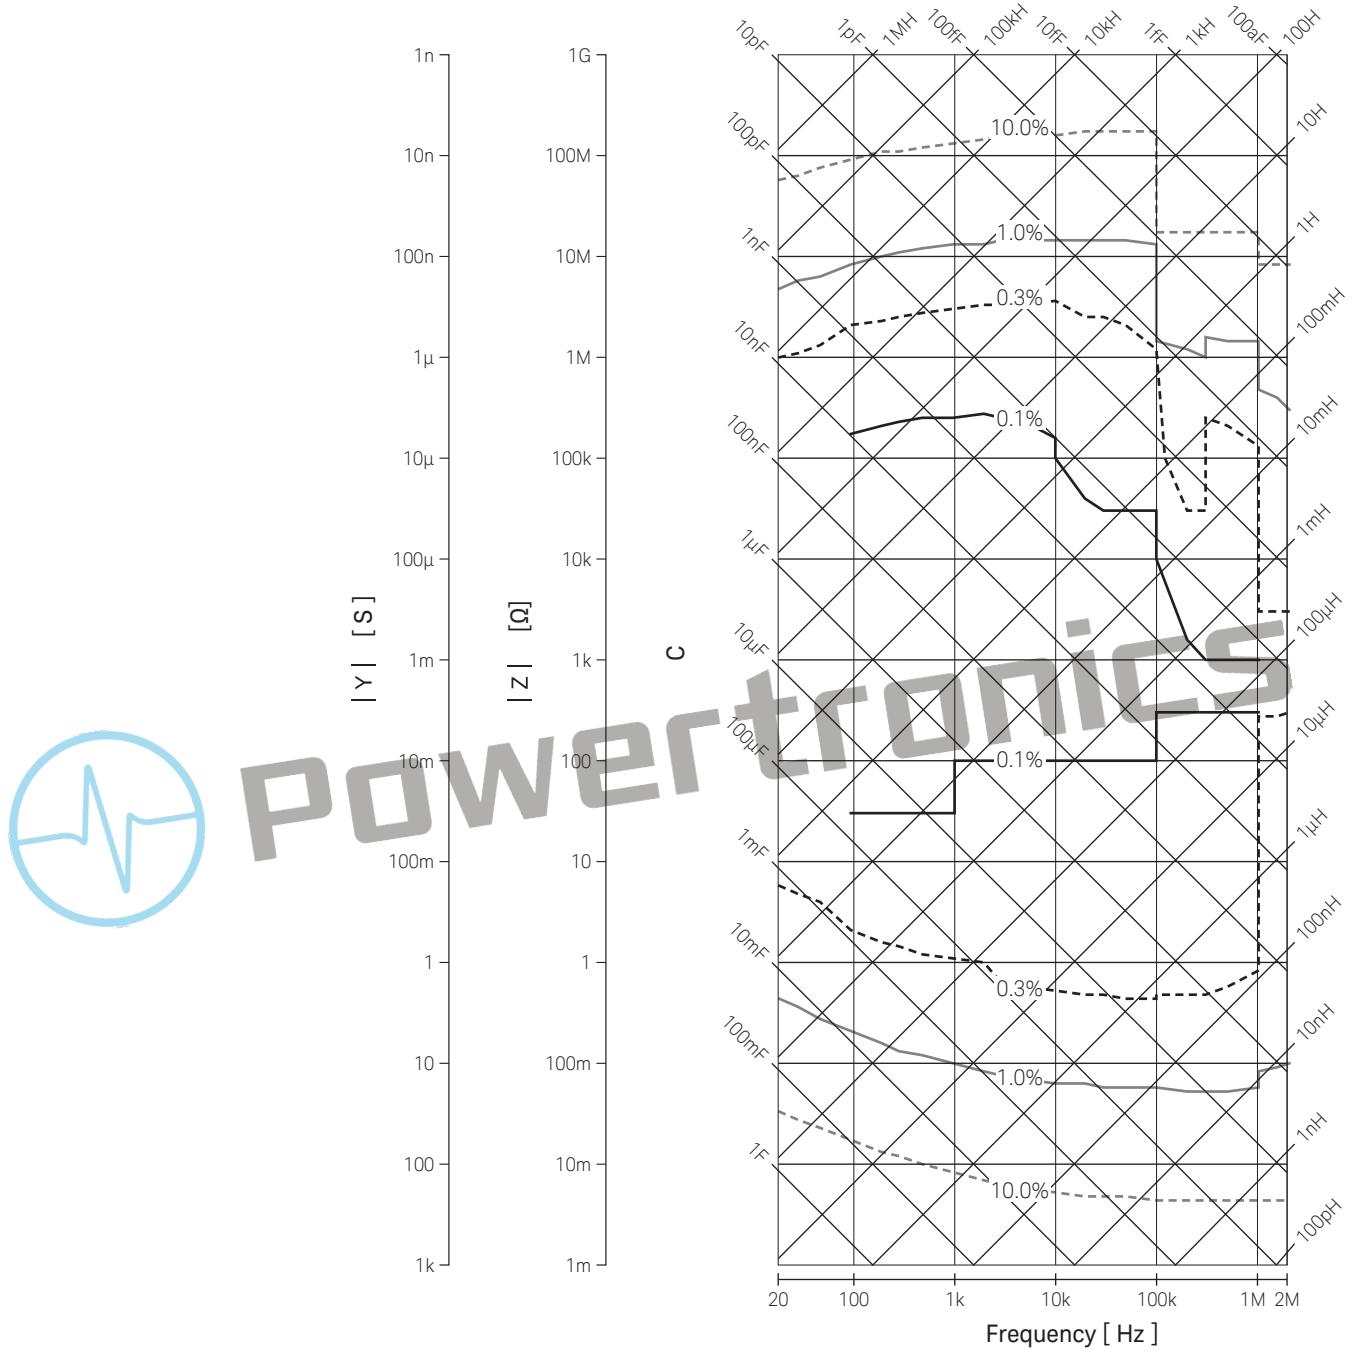


Figure 1. Impedance measurement accuracy (Test signal voltage = 1 Vrms, cable length = 0 m, measurement time mode = MED)



Compensation function

Table 28. The E4980A provides three types of compensation functions: OPEN compensation, SHORT compensation, and LOAD compensation.

Type of compensation	Description
OPEN compensation	Compensates errors caused by the stray admittance (C, G) of the test fixture.
SHORT compensation	Compensates errors caused by the residual impedance (L, R) of the test fixture.
LOAD compensation	Compensates errors between the actual measured value and a known standard value under the measurement conditions desired by the user.

List sweep

Points: There is a maximum of 201 points.

Note

A parameter selected for one of the two parameters cannot be selected for the other parameter. It is not possible to set up a combination of test signal voltage and test signal current or one of test signal voltage of DC bias signal and test signal current of DC bias.

The secondary parameter can be set only with SCPI commands.

First sweep parameter (primary parameter): Test frequency, test signal voltage, test signal current, test signal voltage of DC bias signal, test signal current of DC bias signal, DC source voltage.

Second sweep parameter (secondary parameter): None, impedance range, test frequency, test signal voltage, test signal current, test signal voltage of DC bias signal, test signal current of DC bias signal, DC source voltage

Trigger mode

Sequential mode: When the E4980A is triggered once, the device is measured at all sweep points. /EOM/INDEX is output only once.

Step mode: The sweep point is incremented each time the E4980A is triggered. /EOM/INDEX is output at each point, but the result of the comparator function of the list sweep is available only after the last /EOM is output.



Comparator function of list sweep: The comparator function enables setting one pair of lower and upper limits for each measurement point.

You can select from: Judge with the first sweep parameter/Judge with the second parameter/Not used for each pair of limits.

Time stamp function: In the sequential mode, it is possible to record the measurement starting time at each measurement point by defining the time when FW detects a trigger as 0 and obtain it later with the SCPI command.

Comparator function

Bin sort: The primary parameter can be sorted into 9 BINs, OUT_OF_BINS, AUX_BIN, and LOW_C_REJECT. The secondary parameter can be sorted into HIGH, IN, and LOW. The sequential mode and tolerance mode can be selected as the sorting mode.

Limit setup: Absolute value, deviation value, and % deviation value can be used for setup.

BIN count: Countable from 0 to 999999.

DC bias signal

Table 29. Test signal voltage

Range	0 V to +2 V
Resolution	0 V / 1.5 V / 2 V only
Accuracy	0.1% + 2 mV (23°C ± 5°C) (0.1% + 2 mV) × 4 (0 to 18°C or 28 to 55°C)
Output impedance:	100 Ω (nominal)

Measurement assistance functions

Data buffer function: Up to 201 measurement results can be read out in a batch.

Save/Recall function:

- Up to 10 setup conditions can be written to/read from the built-in non-volatile memory.
- Up to 10 setup conditions can be written to/read from the USB memory.
- Auto recall function can be performed when the setting conditions are written to Register 10 of the USB memory.

Key lock function: The front panel keys can be locked.

GPIB: 24-pin D-Sub (Type D-24), female; complies with IEEE488.1, 2 and SCPI

USB host port: Universal serial bus jack, type-A (4 contact positions, contact 1 is on your left), female (for connection to USB memory only).

USB interface port: Universal serial bus jack, type mini-B (4 contact positions); complies with USBTMC-USB488 and USB 2.0; female; for connection to the external controller.

USBTMC: Abbreviation for USB Test & Measurement Class

LAN: 10/100 BaseT Ethernet, 8 pins (two speed options)

LXI Compliance: Class C (only applies to units with firmware revision A.02.00 or later)



Note

This note is for the E4980A/E4980AL units with firmware A.xx.xx.

The following USB memory can be used. Complies with USB 1.1; mass storage class, FAT16/FAT32 format; maximum consumption current is below 500 mA.

Recommended USB memory: 4 GB USB Flash memory (Keysight PN 1819-0637) and 16GB USB Flash memory (Keysight PN 1819-1235).

Use the recommended USB memory device exclusively for the E4980A/E4980AL, otherwise, previously saved data may be cleared. If you use a USB memory other than the recommended device, data may not be saved or recalled normally.

Keysight will NOT be responsible for data loss in the USB memory caused by using the E4980A/E4980AL.



Options

Note

Option xxx is described as E4980A-xxx in the order information

Frequency options

E4980A	20 Hz to 2 MHz
E4980AL-032	20 Hz to 300 kHz
E4980AL-052	20 Hz to 500 kHz
E4980AL-102	20 Hz to 1 MHz

Table 30. Installable options

Options	E4980A	E4980AL
Power and DC bias enhancement (001)	Installable	Not installable
DCR measurement (200)	Installable ¹	Not installable ²
Handler interface (201)	Installable	Installable
Scanner interface (301)	Installable	Installable

Interface options

Option 201 (Handler interface)

Adds handler interface.

Option 301 (Scanner interface)

Adds scanner interface.

Option 710 (No interface)

An option with no interface.

Up to 2 interface options can be installed in the interface connector on the rear panel.

When no interface is installed, two of the option 710 are installed. When one interface is installed, the option number of its interface and one option 710 are installed.



Other options

Option 001 (Power and DC Bias enhancement)

Increases test signal voltage and adds the variable DC bias voltage.

Option 007 (Standard model)

Upgrades the entry model to the standard (only available in E4980AU).

Option 200 (DCR measurement)

Adds DCR measurement

Note

Option 007 can be installed only in the E4980A with option 005.

Note

E4980A-200/001 and E4980AL-032/052/102 supports DCR measurement function.

1. Mandatory option
2. DCR measurement function is equipped by default.



Power and DC bias enhancement specification

Increases test signal voltage and adds the variable DC bias voltage function.
The Vdc-Idc measurement function is available when the option 001 is installed.

Measurement parameters

The following parameters can be used.

- L_p -Rdc
- L_s -Rdc
- Vdc-Idc

where

Rdc	Direct-current resistance (DCR)
Vdc	Direct-current voltage
Idc	Direct-current electricity

Test signal

Signal level

Table 31. Test signal voltage

Range	0 Vrms to 20 Vrms (test frequency \leq 1 MHz) 0 Vrms to 15 Vrms (test frequency $>$ 1 MHz)	
Resolution	100 μ Vrms (0 Vrms \leq - \leq 0.2 Vrms) 200 μ Vrms (0.2 Vrms < - \leq 0.5 Vrms) 500 μ Vrms (0.5 Vrms < - \leq 1 Vrms) 1 mVrms (1 Vrms < - \leq 2 Vrms) 2 mVrms (2 Vrms < - \leq 5 Vrms) 5 mVrms (5 Vrms < - \leq 10 Vrms) 10 mVrms (10 Vrms < - \leq 20 Vrms)	
Setup accuracy	normal	$\pm(10\% + 1 \text{ mVrms})$ (test signal voltage \leq 2 Vrms) (test frequency \leq 1 MHz : spec., test frequency $>$ 1 MHz : typ.)
		$\pm(10\% + 10 \text{ mVrms})$ (Test frequency \leq 300 kHz, test signal voltage $>$ 2 Vrms) (spec.)
		$\pm(15\% + 20 \text{ mVrms})$ (test frequency $>$ 300 kHz, test signal voltage $>$ 2 Vrms) (test frequency \leq 1 MHz : spec., test frequency $>$ 1 MHz : typ.)
Constant ¹		$\pm(6\% + 1 \text{ mVrms})$ (test signal voltage \leq 2 Vrms) (test frequency \leq 1 MHz : spec., test frequency $>$ 1 MHz : typ.)
		$\pm(6\% + 10 \text{ mVrms})$ (test frequency \leq 300 kHz, test signal voltage $>$ 2 Vrms) (spec.)
		$\pm(12\% + 20 \text{ mVrms})$ (test frequency $>$ 300 kHz, test signal voltage $>$ 2 Vrms) (test frequency \leq 1 MHz : spec., test frequency $>$ 1 MHz : typ.)



1. When auto level control function is on.



Table 32. Test signal current

Range	0 Arms - 100 mArms	
Resolution	1 µArms (0 Arms ≤ - ≤ 2 mArms) 2 µArms (2 mArms < - ≤ 5 mArms) 5 µArms (5 mArms < - ≤ 10 mArms) 10 µArms (10 mArms < - ≤ 20 mArms) 20 µArms (20 mArms < - ≤ 50 mArms) 50 µArms (50 mArms < - ≤ 100 mArms)	
Setup accuracy	normal $\pm(10\% + 10 \mu\text{Arms})$ (test signal voltage ≤ 20 mArms) (test frequency ≤ 1 MHz : spec., test frequency > 1 MHz : typ.) $\pm(10\% + 100 \mu\text{Arms})$ (test frequency ≤ 300 kHz, test signal current > 20 mArms) (spec.) $\pm(15\% + 200 \mu\text{Arms})$ (test frequency > 300 kHz, test signal voltage > 20 mArms) (test frequency ≤ 1 MHz : spec., test frequency > 1 MHz : typ.)	
Constant ¹	$\pm(6\% + 10 \mu\text{Arms})$ (test signal voltage ≤ 20 mArms) (test frequency ≤ 1 MHz : spec., test frequency > 1 MHz : typ.) $\pm(6\% + 100 \mu\text{Arms})$ (test frequency ≤ 300 kHz, test signal voltage > 20 mArms) (spec.) $\pm(12\% + 200 \mu\text{Arms})$ (test frequency > 300 kHz, test signal voltage > 20 mArms) (test frequency ≤ 1 MHz : spec., test frequency > 1 MHz : typ.)	

Test signal level monitor function

- Test signal voltage and test signal current can be monitored.
- Level monitor accuracy:



Powertronics

Table 33. Test signal voltage monitor accuracy (Vac)

Test signal voltage ²	Test frequency	Specification
5 mVrms to 2 Vrms	≤ 1 MHz	$\pm(3\% \text{ of reading value} + 0.5 \text{ mVrms})$
	> 1MHz	$\pm(6\% \text{ of reading value} + 1 \text{ mVrms})$
> 2 Vrms	≤ 300 kHz	$\pm(3\% \text{ of reading value} + 5 \text{ mVrms})$
	> 300 kHz	$\pm(6\% \text{ of reading value} + 10 \text{ mVrms})^3$

Table 34. Test signal current monitor accuracy (Iac)

Test signal current ²	Test frequency	Specification
50 µArms to 20 mArms	≤ 1 MHz	$\pm(3\% \text{ of reading value} + 5 \mu\text{Arms})$
	> 1MHz	$\pm(6\% \text{ of reading value} + 10 \mu\text{Arms})$
> 20 mArms	≤ 300 kHz	$\pm(3\% \text{ of reading value} + 50 \mu\text{Arms})$
	> 300 kHz	$\pm(6\% \text{ of reading value} + 100 \mu\text{Arms})$

1. When auto level control function is on.
2. This is not an output value but a displayed test signal level
3. Typ. when test frequency is > 1 MHz with test signal voltage > 10 Vrms.



DC bias signal

Table 35. Test signal voltage

Range	-40 V to +40 V	
Resolution	Setup resolution: 100 µV, effective resolution: 330 µV ±(0 V ≤ - ≤ 5 V) 1 mV ±(5 V < - ≤ 10 V) 2 mV ±(10 V < - ≤ 20 V) 5 mV ±(20 V < - ≤ 40 V)	
Accuracy	test signal voltage ≤ 2 Vrms	0.1% + 2 mV (23°C ±5°C) (0.1% + 2 mV) x 4 (0 to 18°C or 28 to 55°C)
	test signal voltage > 2 Vrms	0.1 % + 4 mV (23°C ±5°C) (0.1% + 4 mV) x 4 (0 to 18°C or 28 to 55°C)

Table 36. Test signal current

Range	-100 mA - 100 mA
Resolution	Setup resolution: 1 µA, effective resolution: 3.3 µA ±(0 A ≤ - ≤ 50 mA) 10 µA ±(50 mA < - ≤ 100 mA)



Powertronics
DC bias voltage level monitor Vdc
(0.5% of reading value + 60 mV) × Kt
When using Vdc-Idc measurement: (spec.)

When using level monitor: (typ.)

Kt Temperature coefficient

DC bias current level monitor Idc

(A [%] of the measurement value + B [A]) × Kt

When using Vdc-Idc measurement: (spec.)

When using level monitor: (typ.)

A [%] When the measurement time mode is SHORT: 2%
When the measurement time mode is MED or LONG: 1%

B [A] given below

Kt Temperature coefficient

When the measurement mode is SHORT, double the following value.



Table 37. Test signal voltage ≤ 0.2 Vrms (measurement time mode = MED, LONG)

DC bias	Impedance range [Ω]				
current range	< 100	100	300, 1 k	3 k, 10 k	30k, 100 k
20 μ A	150 μ A	30 μ A	3 μ A	300 nA	45 nA
200 μ A	150 μ A	30 μ A	3 μ A	300 nA	300 nA
2 mA	150 μ A	30 μ A	3 μ A	3 μ A	3 μ A
20 mA	150 μ A	30 μ A	30 μ A	30 μ A	30 μ A
100 mA	150 μ A	150 μ A	150 μ A	150 μ A	150 μ A

Table 38. 0.2 Vrms $<$ test signal voltage ≤ 2 Vrms (measurement time mode = MED, LONG)

DC bias	Impedance range [Ω]				
current range	< 100	100, 300	1k, 3 k	10k, 30 k	100 k
20 μ A	150 μ A	30 μ A	3 μ A	300 nA	45 nA
200 μ A	150 μ A	30 μ A	3 μ A	300 nA	300 nA
2 mA	150 μ A	30 μ A	3 μ A	3 μ A	3 μ A
20 mA	150 μ A	30 μ A	30 μ A	30 μ A	30 μ A
100 mA	150 μ A	150 μ A	150 μ A	150 μ A	150 μ A

Table 39. Test signal voltage > 2 Vrms (measurement time mode = MED, LONG)

DC bias	Impedance range [Ω]			
current range	≤ 300	1 k, 3 k	10k, 30 k	100 k
20 μ A	150 μ A	30 μ A	3 μ A	300 nA
200 μ A	150 μ A	30 μ A	3 μ A	300 nA
2 mA	150 μ A	30 μ A	3 μ A	3 μ A
20 mA	150 μ A	30 μ A	30 μ A	30 μ A
100 mA	150 μ A	150 μ A	150 μ A	150 μ A

Table 40. Input impedance (nominal)

Input impedance	Conditions
0 Ω	Other than conditions below.
20 Ω	Test signal voltage ≤ 0.2 Vrms, Impedance range ≥ 3 k Ω , DC bias current range ≤ 200 μ A
	Test signal voltage ≤ 2 Vrms, Impedance range ≥ 10 k Ω , DC bias current range ≤ 200 μ A
	Test signal voltage > 2 Vrms, Impedance range = 100 k Ω , DC bias current range ≤ 200 μ A

DC source signal

Table 41. Test signal voltage

Range	-10 V to 10 V
Resolution	1 mV
Accuracy	0.1% + 3 mV (23°C ± 5 °C) (0.1% + 3 mV) x 4 (0 to 18°C or 28 to 55°C)

Table 42. Test signal current

Range	-45 mA to 45 mA (nominal)
-------	---------------------------

Output impedance
100 Ω (nominal)



DCR measurement specification

DC resistance (R_{dc}) measurement function is available when either E4980A-001/200 or E4980AL-032/052/102 is installed.

DC resistance (R_{dc}) accuracy

Absolute measurement accuracy A_a

Absolute measurement accuracy A_a is given as

$$\text{Equation 15.} \quad A_a = A_e + A_{cal}$$

A_a Absolute accuracy (% of reading value)

A_e Relative accuracy (% of reading value)

A_{cal} Calibration accuracy

Relative measurement accuracy A_e

Relative measurement accuracy A_e is given as

$$\text{Equation 16.} \quad A_e = [A_b + (R_s / |R_m| + G_o \times |R_m|) \times 100] \times K_t$$

R_m Measurement value

A_b Basic accuracy

R_s Short offset [Ω]

G_o Open offset [S]

K_t Temperature coefficient

Calibration accuracy A_{cal}

Calibration accuracy A_{cal} is 0.03%.

Basic accuracy A_b

Table 43. Basic accuracy A_b is given below.

Measurement time mode	Test signal voltage	
	≤ 2 Vrms	> 2 Vrms
SHORT	1.00%	2.00%
MED	0.30%	0.60%

Open offset G_o

Table 44. Open offset G_o is given below.

Measurement time mode	Test signal voltage	
	≤ 2 Vrms	> 2 Vrms
SHORT	50 nS	500 nS
MED	10 nS	100 nS

Short offset R_s

Table 45. Short offset R_s is given below.

Measurement time mode	Test signal voltage	
	≤ 2 Vrms	> 2 Vrms
SHORT	25 m Ω	250 m Ω
MED	5 m Ω	50 m Ω



Powertronics



Effect of cable length (Short offset)

Table 46. The following value is added to Rs when the cable is extended.

Cable length

1 m	2 m	4 m
0.25 mΩ	0.5 mΩ	1 mΩ

Temperature coefficient Kt

Table 47. Temperature coefficient Kt is given below.

Temperature [°C]	Kt
0 ≤ - < 18	4
18 ≤ - ≤ 28	1
28 < - ≤ 55	4



Powertronics



General Specifications

Table 48. Power source

Voltage	90 VAC - 264 VAC
Frequency	47 Hz - 63 Hz
Power consumption	Max. 150 VA

Table 49. Operating environment

Temperature	0 - 55°C
Humidity ($\leq 40^\circ\text{C}$, no condensation)	15% - 85% RH
Altitude	0 m - 2000 m

Table 50. Storage environment

Temperature	-20 - 70°C
Humidity ($\leq 60^\circ\text{C}$, no condensation)	0% - 90% RH
Altitude	0 m - 4572 m

Outer dimensions: 375 (width) x 105 (height) x 390 (depth) mm (nominal)

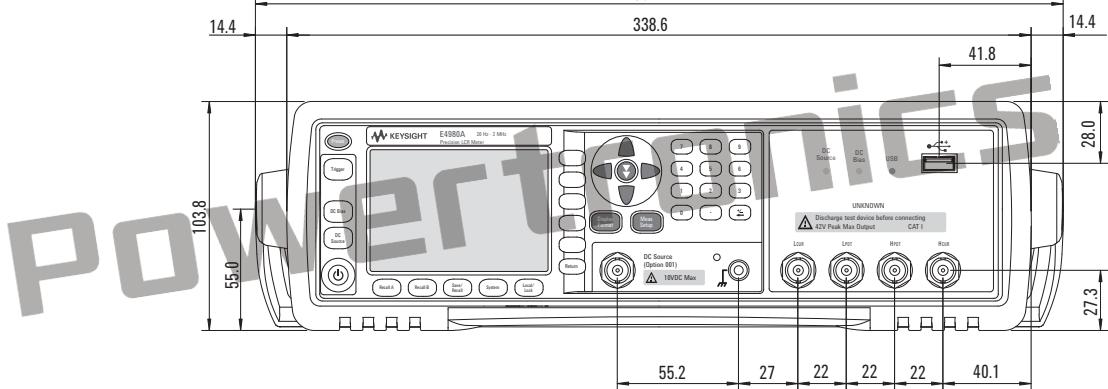


Figure 2. Dimensions (front view, with handle and bumper, in millimeters, nominal)

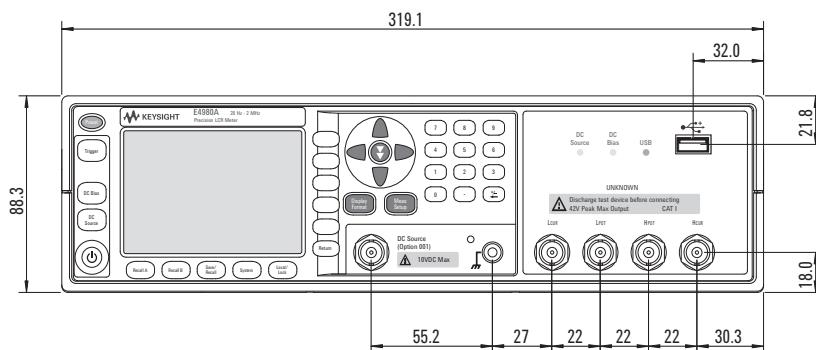


Figure 3. Dimensions (front view, without handle and bumper, in millimeters, nominal)



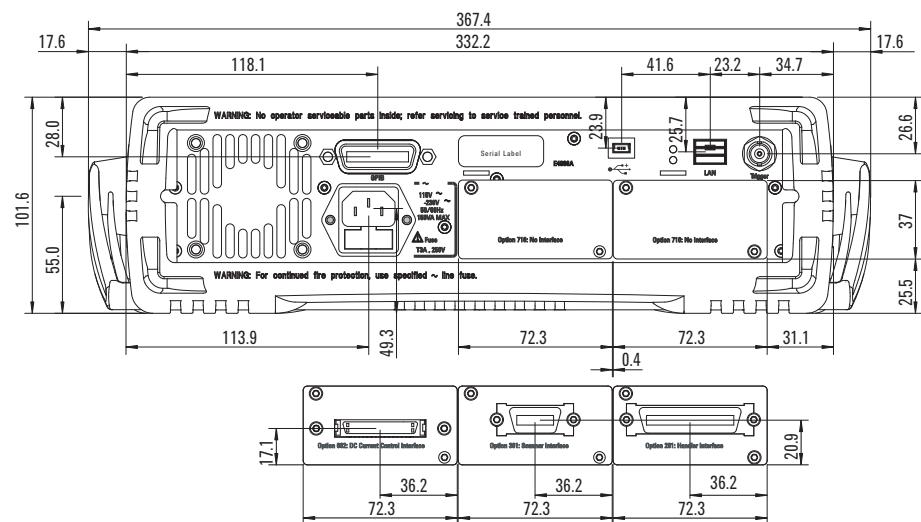


Figure 4. Dimensions (rear view, with handle and bumper, in millimeters, nominal)

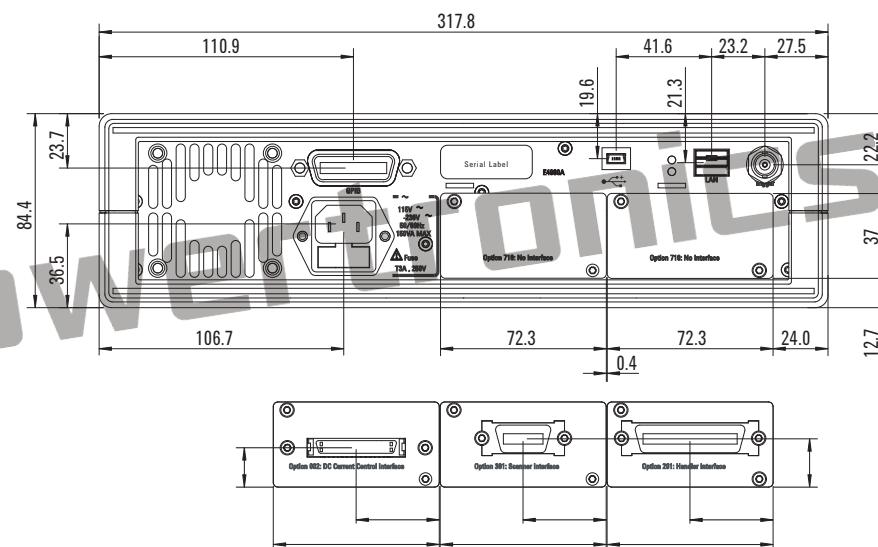


Figure 5. Dimensions (rear view, with handle and bumper, in millimeters, nominal)



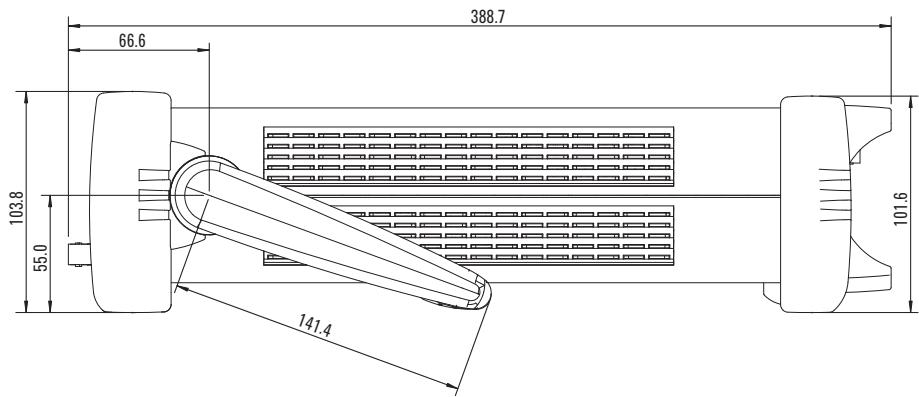


Figure 6. Dimensions (side view, with handle and bumper, in millimeters, nominal)

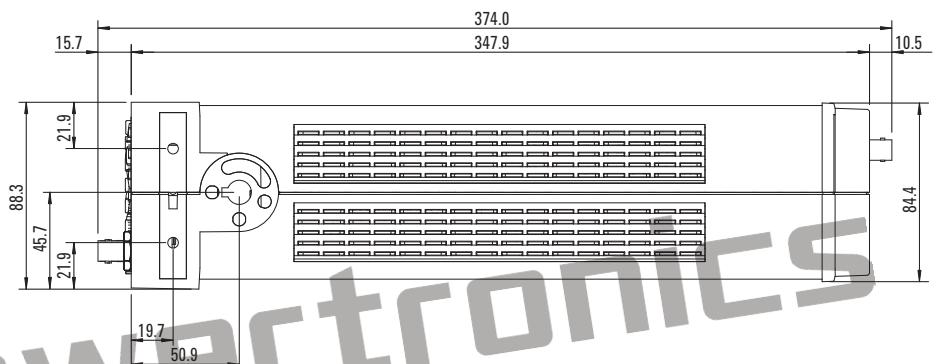


Figure 7. Dimensions (side view, without handle and bumper, in millimeters, nominal)



Powertronics

Weight: 5.3 kg (nominal)

Display: LCD, 320 × 240 (pixels), RGB color

Note

Effective pixels are more than 99.99%. There may be 0.01% (approx. 7 pixels) or smaller missing pixels or constantly lit pixels, but this is not a malfunction.

The following items can be displayed:

- Measurement value
- Measurement conditions
- Limit value and judgment result of comparator
- List sweep table
- Self-test message



Description	Supplemental Information
EMC	
 ISM 1-A	European Council Directive 2004/108/EC IEC 61326-1:2012 EN 61326-1:2013 CISPR 11:2009 +A1:2010 EN 55011: 2009 +A1:2010 Group 1, Class A IEC 61000-4-2:2008 EN 61000-4-2:2009 4 kV CD / 8 kV AD IEC 61000-4-3:2006 +A1:2007 +A2:2010 EN 61000-4-3:2006 +A1:2008 +A2:2010 3 V/m, 80-1000 MHz, 1.4 - 2.0 GHz / 1V/m, 2.0 - 2.7 GHz, 80% AM IEC 61000-4-4:2004 +A1:2010 EN 61000-4-4:2004 +A1:2010 1 kV power lines / 0.5 kV signal lines IEC 61000-4-5:2005 EN 61000-4-5:2006 0.5 kV line-line / 1 kV line-ground IEC 61000-4-6:2008 EN 61000-4-6:2009 3 V, 0.15-80 MHz, 80% AM IEC 61000-4-8:2009 EN 61000-4-8:2010 30A/m, 50/60Hz IEC 61000-4-11:2004 EN 61000-4-11:2004 0.5-300 cycle, 0% / 70%
Note:	When tested at 3 V/m according to EN61000-4-3, the measurement accuracy will be within specifications over the full immunity test frequency range except when the meter frequency is identical to the transmitted interference signal test frequency (the frequencies around the carrier frequency and frequencies around the modulation frequency).
ICES/NMB-001	ICES-001:2006 Group 1, Class A 
KC MSIP-REM-Kst-WNMODSF36	KN11, KN61000-6-1 and KN61000-6-2 Group 1, Class A
Safety	
 ISM 1-A	European Council Directive 2006/95/EC IEC 61010-1:2001/EN 61010-1:2001 Measurement Category I, Pollution Degree 2, Indoor Use IEC60825-1:1994 Class 1 LED
	CAN/CSA C22.2 61010-1-04 Measurement Category I, Pollution Degree 2, Indoor Use
Environment	
	This product complies with the WEEE Directive (2002/96/EC) marking requirements. The afixed label indicates that you must not discard this electrical/electronic product in domestic house hold waste. Product Category: With reference to the equipment types in the WEEE Directive Annex I, this product is classed as a "Monitoring and Control instrumentation" product.



Supplemental Information

Settling time

Table 51. Test frequency setting time

Test frequency setting time	Test frequency (Fm)
5 ms	Fm \geq 1 kHz
12 ms	1 kHz > Fm \geq 250 Hz
22 ms	250 Hz > Fm \geq 60 Hz
42 ms	60 Hz > Fm

Table 52. Test signal voltage setting time

Test signal voltage setting time	Test frequency (Fm)
11 ms	Fm \geq 1 kHz
18 ms	1 kHz > Fm \geq 250 Hz
26 ms	250 Hz > Fm \geq 60 Hz
48 ms	60 Hz > Fm

Switching of the impedance range is as follows:
 \leq 5 ms/ range switching

Measurement circuit protection

The maximum discharge withstand voltage, where the internal circuit remains protected if a charged capacitor is connected to the UNKNOWN terminal, is given below.

Note

Discharge capacitors before connecting them to the UNKNOWN terminal or a test fixture to avoid damages to the instrument.



Table 53. Maximum discharge withstand voltage

Maximum discharge withstand voltage	Range of capacitance value C of DUT
1000 V	C < 2 μ F
$\sqrt{2}/C$ V	2 μ F \leq C

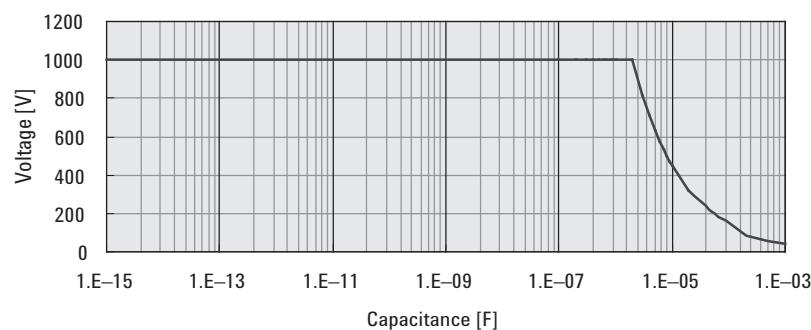


Figure 8. Maximum discharge withstand voltage



Measurement time

Definition

This is the time between the trigger and the end of measurement (EOM) output on the handler interface.

Conditions

Table 54, 55 and 56 show the measurement time when the following conditions are satisfied:

- Normal impedance measurement other than Ls-Rdc, Lp-Rdc, Vdc-Idc
- Impedance range mode: hold range mode
- DC bias voltage level monitor: OFF
- DC bias current level monitor: OFF
- Trigger delay: 0 s
- Step delay: 0 s
- Calibration data: OFF
- Display mode: blank

Table 54. E4980A measurement time [ms](DC bias:OFF)

Measurement time mode	Test frequency						
	20 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	2 MHz
1 LONG	480	300	240	230	220	220	220
2 MED	380	180	110	92	89	88	88
3 SHORT	330	100	20	7.7	5.7	5.6	5.6

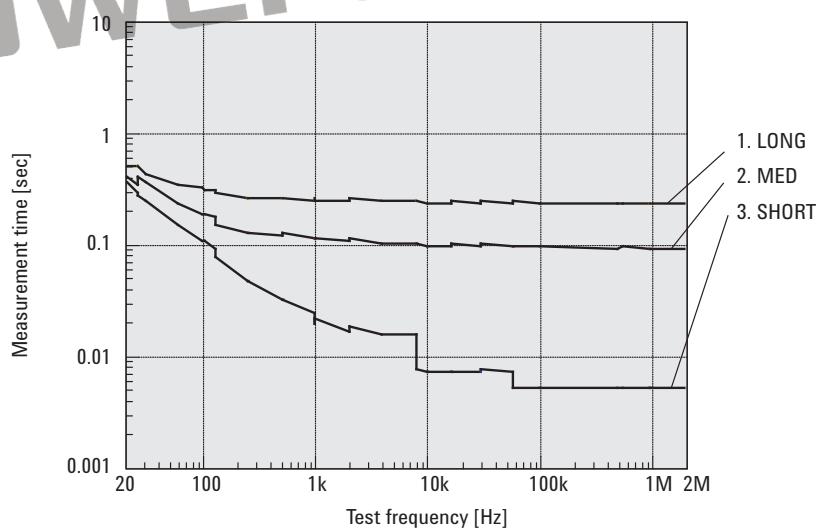


Figure 9. Measurement time (E4980A, DC bias: OFF)



Note

E4980A-005 is obsolete and not available in a new purchase.

Table 55. E4980A-005 measurement time [ms] (DC bias: OFF)

Measurement time mode	Test frequency						
	20 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	2 MHz
1 LONG	1190	650	590	580	570	570	570
2 MED	1150	380	200	180	180	180	180
3 SHORT	1040	240	37	25	23	23	23

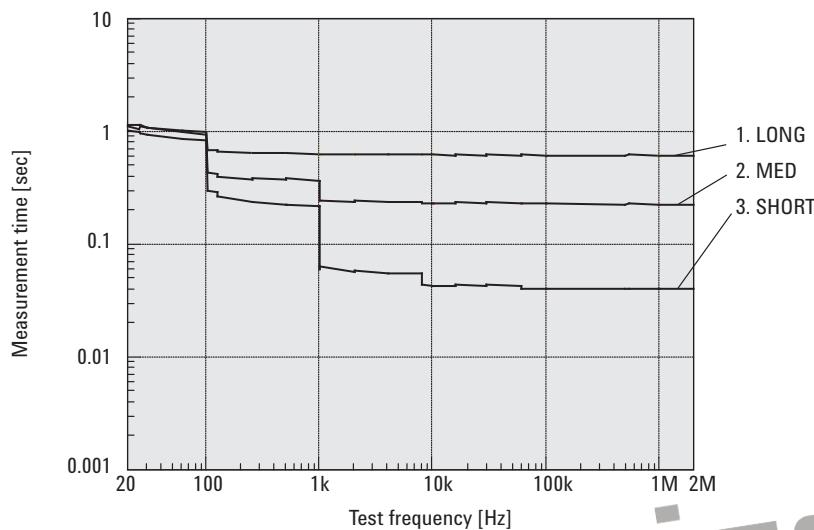


Figure 10. Measurement time (DC bias: OFF, E4980A-005)

Table 56. E4980AL measurement time [ms]

Measurement time mode	Test frequency						
	20 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	2 MHz
1 LONG	729	423	363	353	343	343	343
2 MED	650	250	140	122	119	118	118
3 SHORT	579	149	26	14	12	12	12

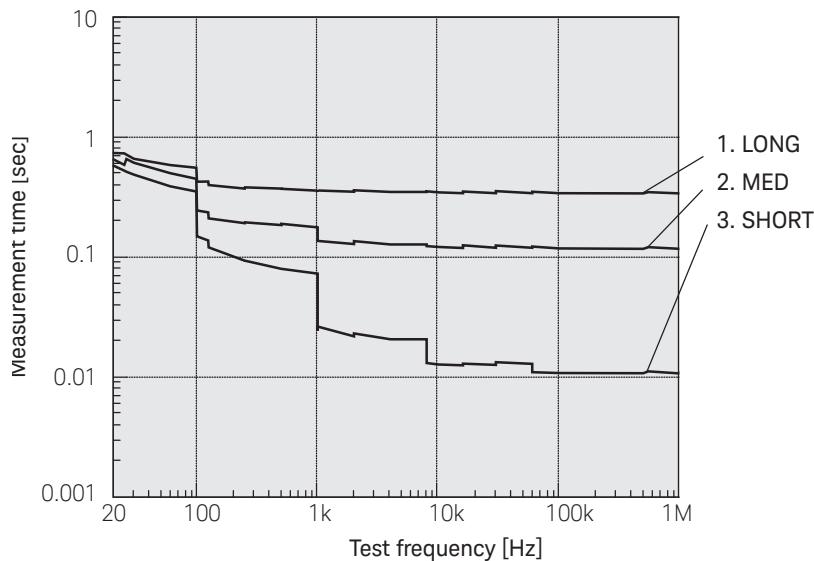


Figure 11. Measurement time (E4980AL)



When DC bias is ON, the following time is added:

Table 57. Additional time when DC bias is ON [ms]

Test frequency						
20 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	2 MHz
30	30	10	13	2	0.5	0.5

When the number of averaging increases, the measurement time is given as

Equation 17.

$$\text{MeasTime} + (\text{Ave} - 1) \times \text{AveTime}$$

MeasTime	Measurement time calculated based on Table 54, 55 and 56
Ave	Number of averaging
AveTime	Refer to Table 58

Table 58. Additional time per averaging [ms]

Measurement time mode	Test frequency						
	20 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	2 MHz
SHORT	51	11	2.4	2.3	2.3	2.2	2.2
MED	110	81	88	87	85	84	84
LONG	210	210	220	220	220	210	210

Table 59. Measurement time when Vdc-Idc is selected [ms]

Measurement time mode	Test frequency						
	20 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	2 MHz
SHORT	210	46	14	14	14	14	14
MED	210	170	170	170	170	170	170
LONG	410	410	410	410	410	410	410

Add the same measurement time per 1 additional average

Additional Measurement time when the Vdc and Idc monitor function is ON.

Add SHORT mode of Table 59. When using only Vdc or Idc, add a half of SHORT mode of Table 59.

Table 60. Measurement time when Ls-Rdc or Lp-Rdc is selected [ms]

Measurement time mode	Test frequency						
	20 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	2 MHz
SHORT	910	230	43	24	22	22	22
MED	1100	450	300	280	270	270	270
LONG	1400	820	700	670	660	650	650

Add the three times of Table 58 Additional Time per 1 additional average number



Display time

Except for the case of the DISPLAY BLANK page, the time required to update the display on each page (display time) is as follows. When a screen is changed, drawing time and switching time are added. The measurement display is updated about every 100 ms.

Table 61. Display time

Item	When Vdc, Idc monitor is OFF	When Vdc, Idc monitor is ON
MEAS DISPLAY page drawing time	10 ms	13 ms
MEAS DISPLAY page (large) drawing time	10 ms	13 ms
BIN No. DISPLAY page drawing time	10 ms	13 ms
BIN COUNT DISPLAY page drawing time	10 ms	13 ms
LIST SWEEP DISPLAY page drawing time	40 ms	–
Measurement display switching time	35 ms	–

Measurement data transfer time

This table shows the measurement data transfer time under the following conditions. The measurement data transfer time varies depending on measurement conditions and computers.

Table 62. Measurement transfer time under the following conditions:

Host computer:	HP Z420 Workstation, Xeon CPU ES-1620 0 @3.60 GHz
Display:	OFF
Impedance range mode:	AUTO (The overload has not been generated.)
OPEN/SHORT/LOAD compensation:	OFF
Test signal voltage monitor:	OFF

Table 63. Measurement data transfer time [ms]

Interface	Data transfer format	Using :FETC? command (one point measurement)		Using data buffer memory (list sweep measurement)			
		Comparator ON	Comparator OFF	10 points	51 points	128 points	201 points
GPIB	ASCII	2	2	4	13	28	43
	ASCII Long	2	2	5	15	34	53
	Binary	2	2	4	10	21	36
USB	ASCII	2	2	3	8	16	23
	ASCII Long	2	2	4	9	19	28
	Binary	2	2	3	5	9	13
LAN	ASCII	3	4	5	12	24	36
	ASCII Long	3	3	5	13	29	44
	Binary	3	3	5	9	18	26



DC bias test signal current (1.5 V/2.0 V): Output current: Max. 20 mA

Option 001 (Power and DC Bias enhance):

DC bias voltage: DC bias voltage applied to DUT is given as:

$$\text{Equation 18.} \quad V_{dut} = V_b - 100 \times I_b$$

V_{dut} [V] DC bias voltage

V_b [V] DC bias setting voltage

I_b [A] DC bias current

DC bias current: DC bias current applied to DUT is given as:

$$\text{Equation 19.} \quad I_{dut} = V_b / (100 + R_{dc})$$

I_{dut} [A] DC bias current

V_b [V] DC bias setting voltage

R_{dc} [Ω] DUT's DC resistance

Maximum DC bias current

Table 64. Maximum DC bias current when the normal measurement can be performed.

Impedance range [Ω]	Bias current isolation	
	ON	OFF
	Test signal voltage ≤ 2 Vrms	Test signal voltage > 2 Vrms
0.1	Auto range mode: 20 mA	100 mA
1	100 mA	100 mA
10	Hold range mode: its values for the range.	20 mA
100	20 mA	100 mA
300	2 mA	100 mA
1 k	2 mA	20 mA
3 k	200 μ A	20 mA
10 k	200 μ A	2 mA
30 k	20 μ A	2 mA
100 k	20 μ A	200 μ A

When DC bias is applied to DUT

When DC bias is applied to the DUT, add the following value to the absolute accuracy Ab.

Table 65. Only when $F_m < 10$ kHz and $|V_{dc}| > 5$ V

SHORT	MED, LONG
$0.05\% \times (100 \text{ mV/Vs}) \times (1 + \sqrt{(100/F_m)})$	$0.01\% \times (100 \text{ mV/Vs}) \times (1 + \sqrt{(100/F_m)})$

F_m [Hz] Test frequency

V_s [V] Test signal voltage



Relative measurement accuracy with bias current isolation

When DC bias Isolation is set to ON, add the following value to the open offset Yo.

$$\text{Equation 20. } Yo_DCI1 \times (1 + 1/(Vs)) \times (1 + \sqrt{(500/Fm)}) + Yo_DCI2$$

Zm [Ω]	Impedance of DUT
Fm [Hz]	Test frequency
Vs [V]	Test signal voltage
Yo_DCI1,2 [S]	Calculate this by using Table 66 and 67
Idc [A]	DC bias isolation current

Table 66. Yo_DCI1 value

DC bias current range	Measurement time mode	
	SHORT	MED, LONG
20 μA	0 S	0 S
200 μA	0.25 nS	0.05 nS
2 mA	2.5 nS	0.5 nS
20 mA	25 nS	5 nS
100 mA	250 nS	50 nS

Table 67. Yo_DCI2 value

DC bias current range	Measurement time mode			
	≤ 100 Ω	300 Ω, 1 kΩ	3 kΩ, 10 kΩ	30 kΩ, 100 kΩ
20 μA	0 S	0 S	0 S	0 S
200 μA	0 S	0 S	0 S	0 S
2 mA	0 S	0 S	0 S	3 nS
20 mA	0 S	0 S	30 nS	30 nS
100 mA	0 S	300 nS	300 nS	300 nS

DC bias settling time

When DC bias is set to ON, add the following value to the settling time:

Table 68. DC bias settling time

Bias	Settling time
1 Standard	Capacitance of DUT × 100 × loge (2/1.8 m) + 3 m
2 Option 001	Capacitance of DUT × 100 × loge (40/1.8 m) + 3 m

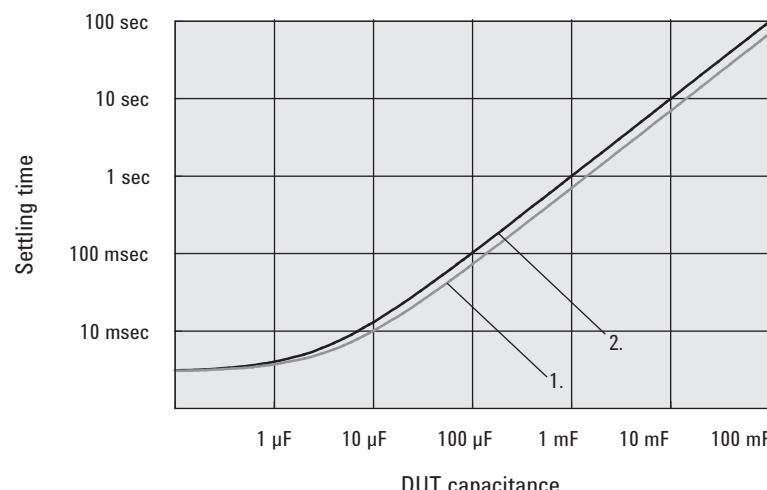


Figure 12. DC bias settling time



Web Resources

Visit our Web sites for additional product information and literature.

E4980A Precision LCR Meter

www.keysight.com/find/e4980a

E4980AL Precision LCR Meter

www.keysight.com/find/e4980al

LCR Meters & Impedance Measurement Products

www.keysight.com/find/impedance

RF & MW test accessories

www.keysight.com/find/mta




Powertronics



Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology. From Hewlett-Packard to Agilent to Keysight.



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.

Lower costs.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/LCRmeters

www.keysight.com/find/E4980A

www.keysight.com/find/E4980AL



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus

(BP-9-7-17)

DEKRA Certified

ISO9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2015

Quality Management System

This information is subject to change without notice.

© Keysight Technologies, 2013, 2014, 2016-2018

Published in USA, April 13, 2018

5989-4435EN

www.keysight.com

